





## 1. The Seat

The straps at the top of the seat will attach in front of the seat and the lower straps will attach behind the seat.

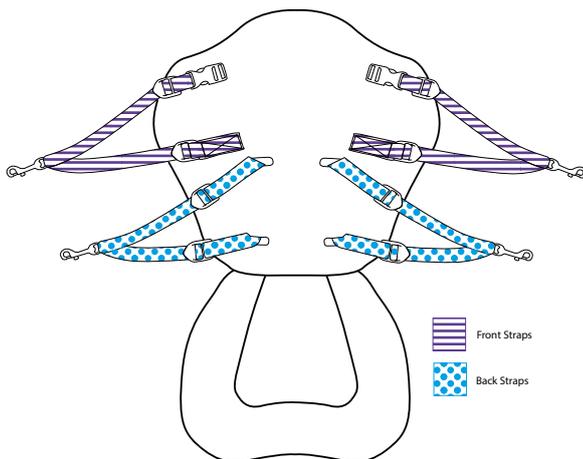

## 2. The Kayak


Locate where you want to attach the straps, below are some examples:

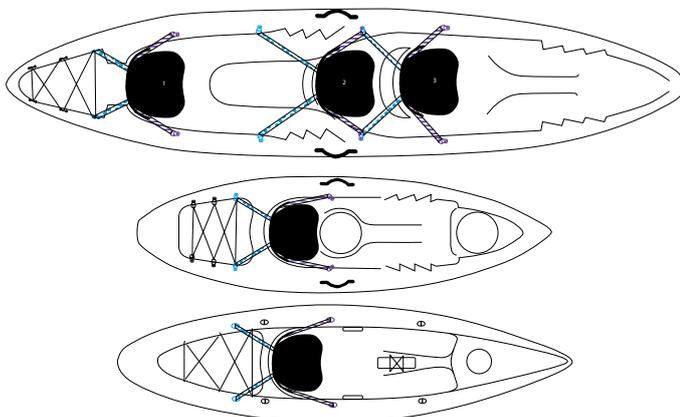

## 3. Place The Seat Into The Kayak

So that the fold of the seat is resting snugly against the back of the seat area.

## 4. Attach The Clips In The Correct Areas.

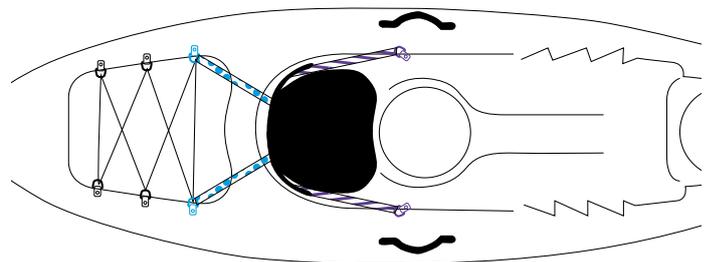

## 5. Tighten the straps

It is best to tighten the straps gradually until you are happy with the position of the seat. Make sure that you end up with the straps taught so that the seat does not move while you are using the kayak. If installed correctly the back rest should end up slightly curved.

**TIP:** To get the most power out of your paddling make sure that the back rest as close to vertical as possible.



## 6. How To Remove The Seat

To remove the seat slightly loosen one of the straps so that you can unclip it. You should then be able to unclip the rest of the straps easily. The next time you put the seat in it will be a lot quicker as all the other straps will be correctly set up.